

## General Notes

**Actual Dimension**  
32-3/8"(W) x 49-1/4"(H)

**Rough Opening**  
32-3/4"(W) x 49-5/8"(H)

NOTE 1:  
Aluminum framing is not bullet resistant rated.

NOTE 2:  
Anchor screws to be supplied by contractor.  
(See Anchor Schedule)

### TYPICAL QSP-713S MINI INSTALLATION

1. Quikserv windows must be installed level & square to work properly.
2. Anchor through each side jamb through the pre-drilled holes. (See FIGURE 1)
3. Recommended height from floor to the bottom of the Window Unit Assembly to be 28". (Check all local & city codes)
4. All other type of anchoring to be approved by certified engineer


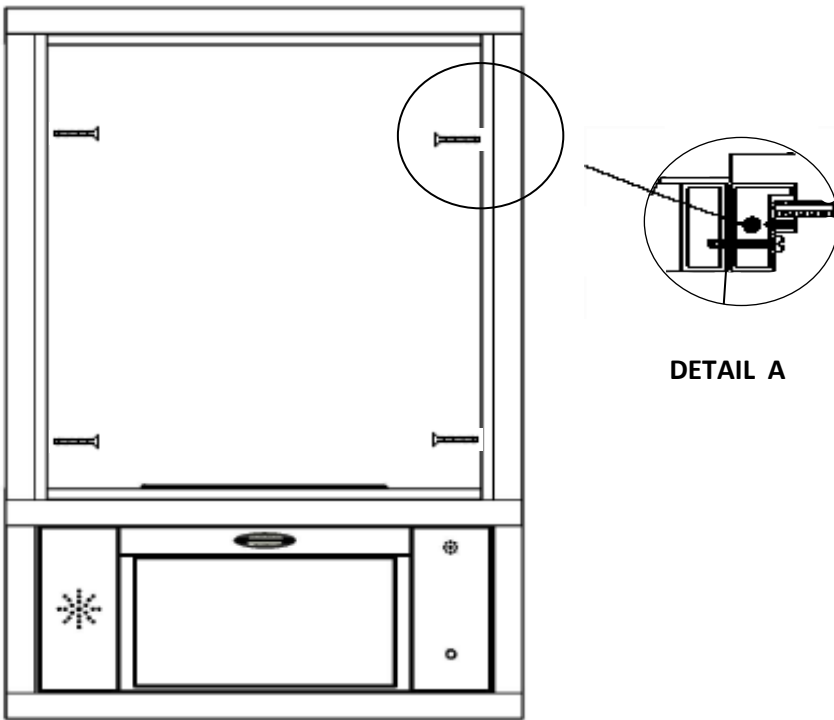


FIGURE 1

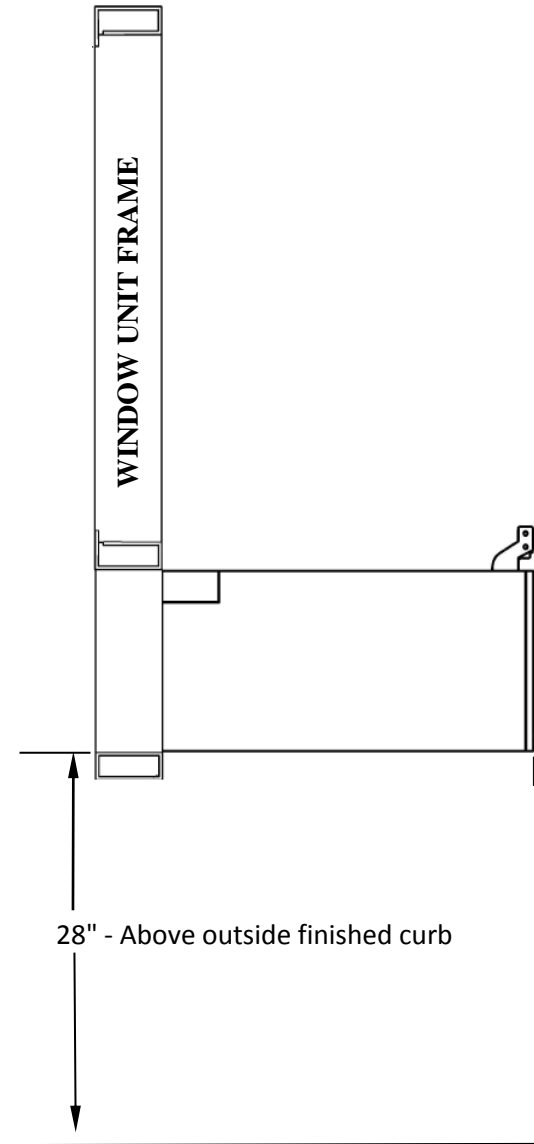

28" - Above outside finished curb

**CAUTION:**  
Use caution when anchoring any other way. All Thread Rods are located in each side jamb. (See DETAIL A)

### ANCHOR SCHEDULE

SUBSTRATE	ANCHOR	MINIUM PENETRATION INTO SUBSTRATE
STEEL ( 16 GA. MIN.)	1/4" SHEET METAL SCREWS	MIN. PROTRUSION OF 3 THREADS BEYOND FULL ENGAGEMENT
CONCRETE	1/4" DIAMETER CONCRETE SCREW	1.25" INTO CONCRETE
WOOD BUCK	# 14 WOOD SCREW	1.50" INTO WOOD (REQUIRES DOUBLE 2X BUCK)

NOTE: THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETY DESIGN ORIGINATED AND OWNED BY QUIKSERV CORP., AND IS SUBMITTED UNDER A CONFIDENTIAL RELATIONS ALL PATENT, MANUFACTURING, SALE RIGHTS REGARDING THE SAME ARE RESERVED EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE RECIPIENT AGREES BY ACCEPTING HIP. THESE DRAWINGS NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING THEM TO ANY UNAUTHORIZED PERSON.

**QUIKSERV**

11441 BRITTMOORE PARK DR.  
HOUSTON, TX., 77041

TITLE: <b>INSTALLATION PROCEDURE</b>				
Drawing Name: <b>QSP-713S MINI INSTALLATION DRAWING</b>				
DATE	DRAWN BY	SCALE	SHEET	SIZE
6/17/2016	RBV	NTS	1 of 1	A