



## Interior View

### Installation Notes

1. Quikserv windows must be installed level and square to work properly.
2. Anchor through each side jamb at two places approx. 5" at top and bottom of each jamb. (See Figure)
3. Recommended height from floor to the bottom of the window unit service opening is to be 36" above finish floor. ( Check all local and city codes )
4. Silicone all external and internal joints.
5. All other type of anchoring to be approved by certified engineer.

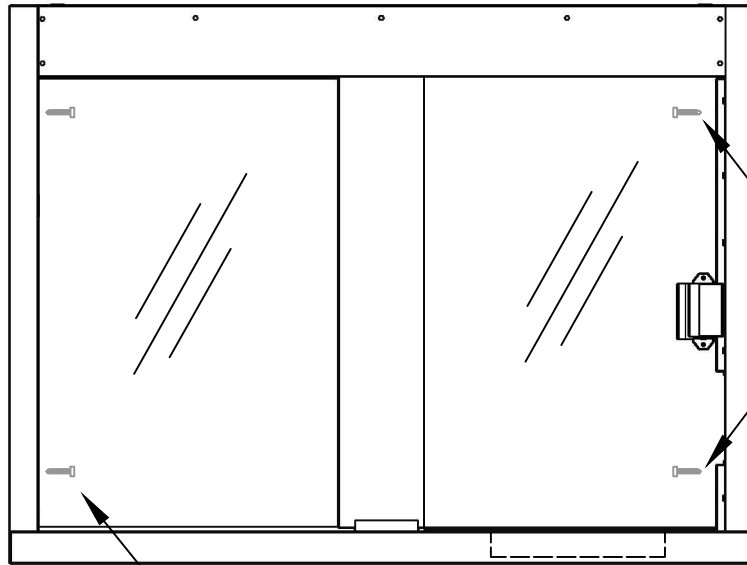


Anchor Point

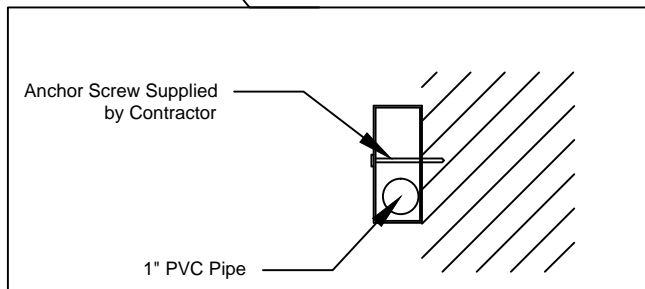

### **Caution:**

Use caution when drilling through side jambs. All thread rods and PVC pipe are located in side jambs.

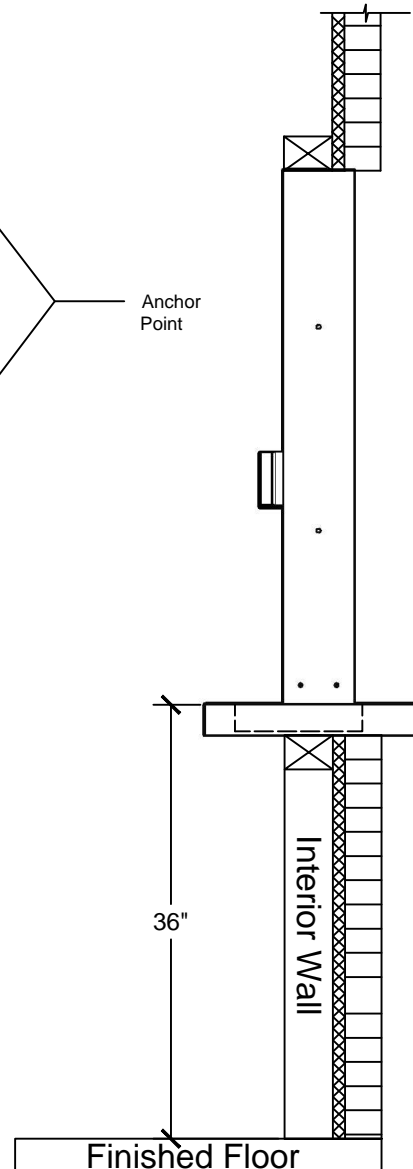

### Key Notes

**Unit:**

Combo Ticket Window / Slider

**Actual Dimension:**

48"(W)x 36"(H)

**Rough Opening:**

48 3/8"(W)x 36 3/8"(H)

**Service Opening:**

18 7/8" (W) x 30" (H)

### Engineer Notes

**Date drawn:** 6/12/2017

**Drawn by:** C.S.

**File name:** twb combo with slider.dwg

**Sheet ID:** TW/S-1

NOTE: THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETY DESIGN ORIGINATED AND OWNED BY QUIKSERV CORP., AND IS SUBMITTED UNDER A CONFIDENTIAL RELATIONS ALL PATENT, MANUFACTURING, SALE RIGHTS REGARDING THE SAME ARE RESERVED EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE RECIPIENT AGREES BY ACCEPTING HIP. THESE DRAWINGS NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING THEM TO ANY UNAUTHORIZED PERSON.