


LIMIT SWITCH ADJUSTMENT

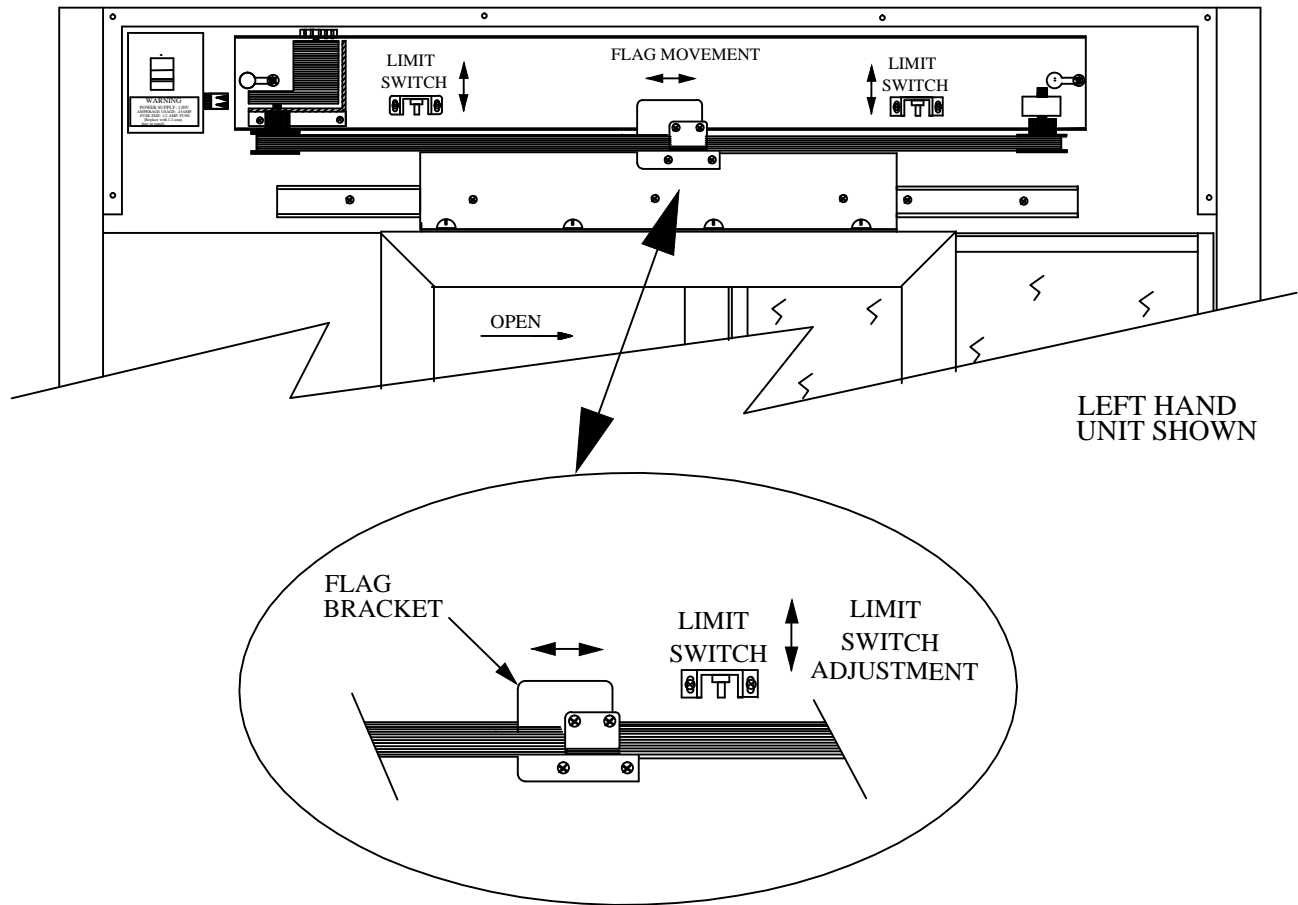

The location of the limit switches can be adjusted by loosening the (2) screws on the bracket and by moving the bracket up or down in the adjustment slots.

When set properly the flag bracket should clear the limit switch by approximately 1/16".

When the flag bracket is positioned under one of the limit switches, the red LED open-close or LED 2 or 3 should not be on.

If one of those LED lights are on you need to adjust the limit switch down more until it sees the flag bracket.

Note: LED 2 or 3 or the open or close LED lights on the PC board should only be on when the doors are moving.

NOTE: THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED AND OWED BY QUIKSERV CORP., AND IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP. ALL PATENT, MANUFACTURING, SALE RIGHTS REGARDING THE SAME ARE RESERVED EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE RECIPIENT AGREES BY ACCEPTING THESE DRAWINGS NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING THEM TO ANY UNAUTHORIZED PERSON.

Quikserv Corp.
www.quikserv.com
 1-800-388-8307

LIMIT SWITCH ADJUSTMENT

Submitted By:

BRIAN COBLE

DATE:

10/27/2014

Sheet:

L-SWITCH