

AIR CURTAINS

AN INVISIBLE PROTECTIVE BARRIER FOR YOUR BUSINESS

Quikserv air curtains are designed to produce a quiet, yet high volume and high velocity stream of air to help guard your building from insects, fumes, dust, odors, and other contaminants when used over drive-thru windows, service doors, and all other building openings. The units are ideal for interior installations and come with a black powder coated casing to suit any application.

KEEPS OUT DUST, AIRBORNE PARTICLES & GERMS & FLYING INSECTS

The air curtain works as an invisible barrier to protect the interior of your building and deter the entrance of all types of contaminants.

PREVENTS CARBON MONOXIDE FROM ENTERING THE KITCHEN

Protect indoor air quality and create a healthier, more sanitized environment by deterring the entrance of fumes from idling vehicles in the drive-thru lane.

LOWERS ENERGY COSTS

Keep outside air from entering the restaurant when the window is open to better control heating and cooling costs in the building.

DECREASES EMPLOYEE TURNOVER

Increase employee wellbeing and comfort by deterring the entrance of fumes and extreme hot or cold air.

EASY TO OPERATE & MAINTAIN

Simple to install and requires little maintenance. The unit comes with a wall mounting plate and a pair of support brackets with fasteners.

The heated air curtain comes with a rheostat, fan / off / fan & heat rocker switch, thermostate to automatically control the temperature.

STANDARD OPTIONS

- Shipped fully assembled and ready to install
- ETL Listed

CUSTOM OPTIONS


Quikserv can provide the option to sync the air curtain with your drive-thru window to allow the unit to operate only when the window is open. Not available on all window models. Ask for details.

WARRANTY

1 year limited warranty



HEATED AIR CURTAIN

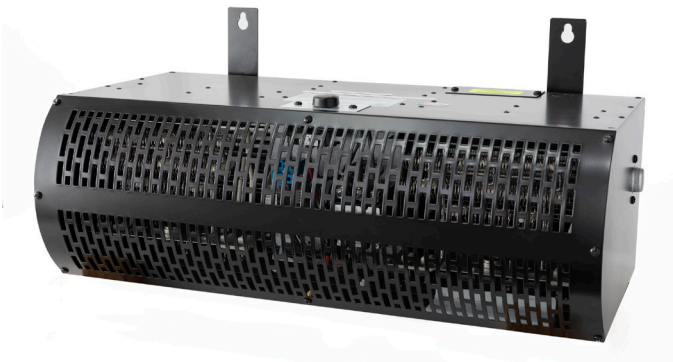

NON-HEATED AIR CURTAIN





NON HEATED AIR CURTAIN SPECIFICATIONS

MODEL	NOZZLE WIDTH (")	LENGTH (")	DEPTH (")	HEIGHT (")	MOTOR (HP)	WEIGHT (LBS)	MAX VELOCITY (FPM)	AIR VOLUME (CFM)	VOLTAGE	KW	AMPS	MAX AMP PROTECTION	POWER SOURCE
QSK1025AA-BK	23.5"	25"	8.94"	8.55	1/5	30	2100	645	120V	0.32	3.4	15 AMPS	SINGLE PHASE




HEATED AIR CURTAIN SPECIFICATIONS

MODEL	NOZZLE WIDTH (")	LENGTH (")	DEPTH (")	HEIGHT (")	MOTOR (HP)	WEIGHT (LBS)	MAX VELOCITY (FPM)	MAX VOLUME (CFM)	VOLTAGE	KW	AMPS	MAX AMP PROTECTION	POWER SOURCE
QSV1025EJ-040-BK	23.5	25	13.94	8.55	1/5	39	2,100	645	208V / 240V	3.0 KW / 4 KW	16.1 / 18.4	25 AMPS	SINGLE PHASE



For the most effective results, your air curtain should be mounted directly above and as close as possible to the service opening on the drive-thru window, without interfering with access to the mechanical compartment above the window.

Air curtains act as an invisible barrier to keep out contaminants such as dust, insects, airborne germs and act as a thermal barrier to better manage heating / cooling costs in buildings.

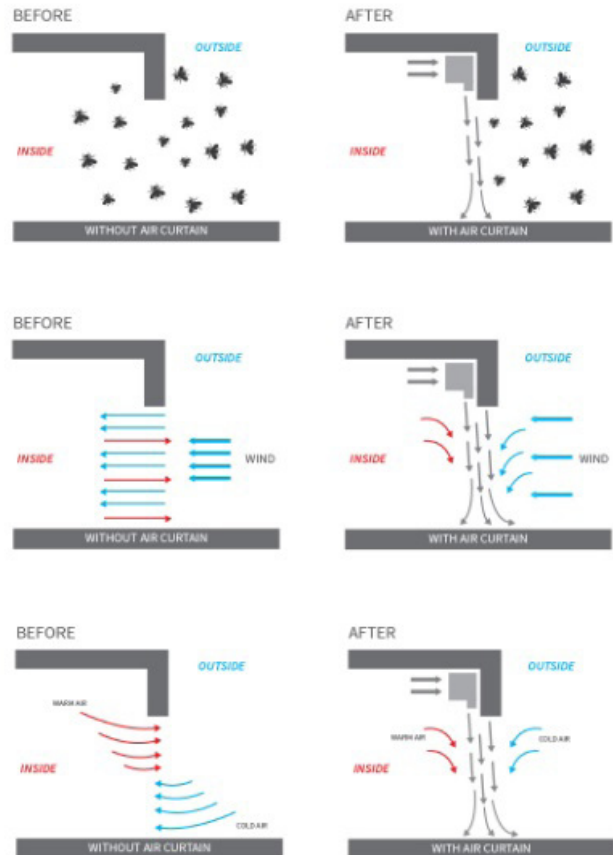

ALL QUIKSERV PRODUCTS ARE SHIPPED FULLY-ASSEMBLED AND READY TO INSTALL.