

TYPICAL SC-4844 INSTALLATION

- 1) QUIKSERV WINDOWS MUST BE INSTALLED LEVEL AND SQUARE TO WORK PROPERLY.
- 2) REMOVE SHIPPING PIN BEFORE INSTALLING WINDOW. SHIPPING PIN LOCATED IN LOCKSIDE JAMB. (SEE FIG. C)
- 3) ANCHOR THROUGH EACH SIDE JAMB AT TWO PLACES TOP & BOTTOM OF EACH JAMB USING PRE-DRILLED HOLES. (SEE FIG. A & B)
- 4) ANCHOR SCREWS TO BE SUPPLIED BY CONTRACTOR.
- 5) CAUTION A 1" PVC TUBE IS LOCATED IN THE LOCKSIDE JAMB- DEPENDING ON LEFT HANDED OR RIGHT. (SEE FIG. B) DRILLING INTO 1" PVC TUBE WILL VOID WARRANTY.
- 6) RECOMMENDED HEIGHT FROM FLOOR TO SERVICE OPENING TO BE 36". (CHECK ANY AND ALL LOCAL OR CITY CODES)
- 7) SILICONE ALL EXTERIOR AND INTERIOR JOINTS.
- 8) ALL OTHER TYPE OF ANCHORING TO BE APPROVED BY CERTIFIED ENGINEER.


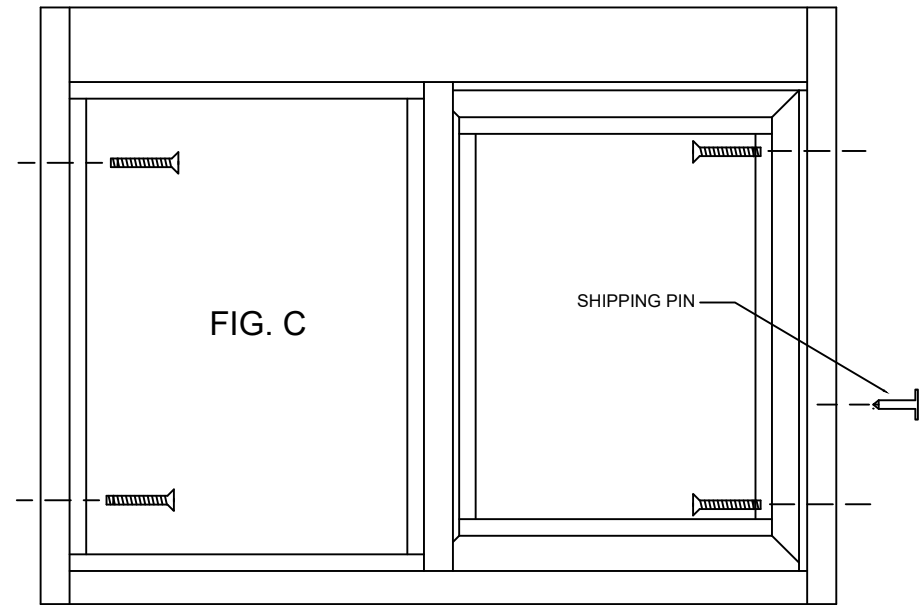


FIG. A

EXTERIOR VIEW SHOWN

FIG. B

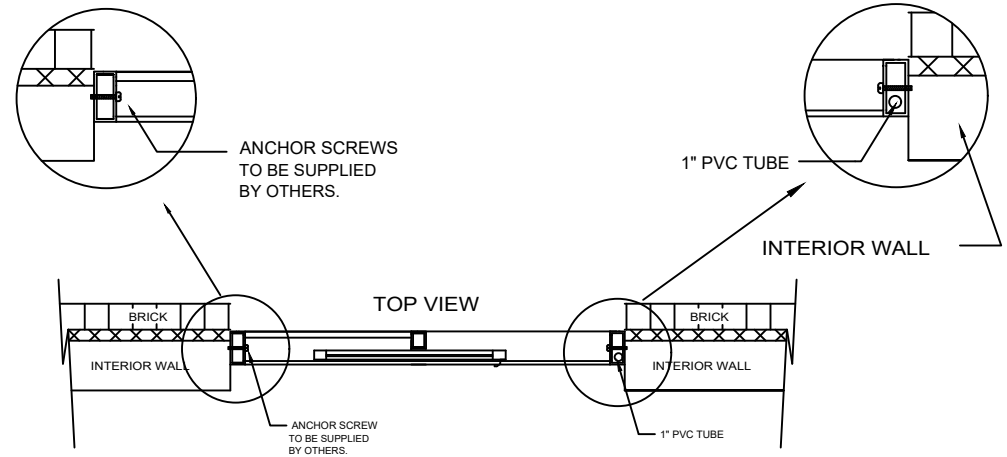

NOTE: THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETY DESIGN ORIGINATED AND OWNED BY QUIKSERV CORP., AND IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP. ALL PATENT, MANUFACTURING, SALE RIGHTS REGARDING THE SAME ARE RESERVED EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE RECIPIENT AGREES BY ACCEPTING THESE DRAWINGS NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING THEM TO ANY UNAUTHORIZED PERSON.

Quikserv Corp.

11441 Brittmoore Park Dr
Houston TX 77041

1-800-388-8307

www.quikserv.com

SC-4844 Installation Drawing

Drawing Name:
SC4844 INSTALLATION DWG.dwg

Scale:
N/A

Date:
12/7/2020

Drawn By:
Avasquez

Rev.

Rough Opening:
47-1/2" (W) X 43-1/2" (H)

Actual Dimension:
47-7/8" (W) X 43-7/8" (H)

Service Opening:
20" (W) X 36-1/2" (H)