




NON-HEATED AIR CURTAIN

DATA SHEET AND DRAWING

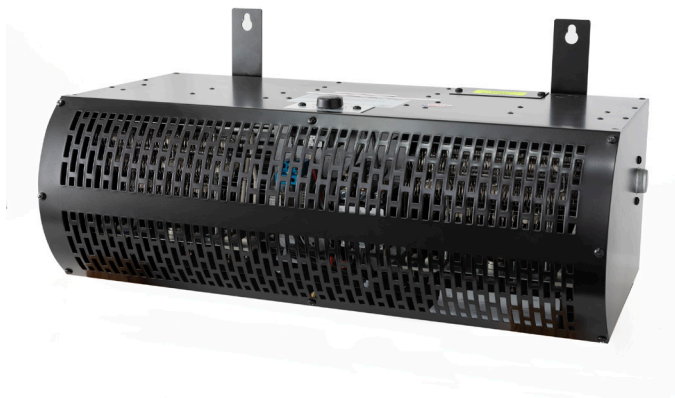

NON-HEATED AIR CURTAIN

STANDARD CONSTRUCTION

- Factory installed rheostat (indoor mounting only)
- 1/5 HP variable speed motor
- Black powder coated exterior
- Wall mounting plate
- Pair of field installed support brackets with fasteners
- For mounting heights up to 6'

UNIT SPECIFICATIONS

QUIKSERV MODEL	QUIKSERV ITEM NUMBER	NOZZLE WIDTH (IN)	LENGTH (IN)	DEPTH (IN)	HEIGHT (IN)	MOTOR (HP)	WEIGHT (LBS)	VOLTAGE	KW	AMPS (120/1/60)	BREAKER RATING	POWER SOURCE
QSK1025AA-BK	9344	23.5	25	8.94	8.55	1/5	30	120V	0.32	3.4	15	SINGLE PHASE


UNIT PERFORMANCE

MAX VELOCITY AT NOZZLE (FPM)	AVERAGE OUTLET VELOCITY (FPM)	CORE VELOCITY 2 FT FROM NOZZLE (FPM)	CORE VELOCITY 3 FT FROM NOZZLE (FPM)	CORE VELOCITY 4 FT FROM NOZZLE (FPM)	OUTLET VELOCITY UNIFORMITY	AIR VOLUME (CFM)	SOUND LEVEL (3M IN FREE FIELD) (DBA)
2100	1,757	1806	1494	1279	89%	645	LOW / HIGH SPEED 53 / 54


ALL QUIKSERV PRODUCTS ARE SHIPPED FULLY-ASSEMBLED AND READY TO INSTALL.

QUIKSERV CORP. • 11441 BRITTMOORE PARK DRIVE • HOUSTON, TX 77041 • 800-388-8307 • 713-849-5882 • FAX 713-849-5708 • WWW.QUIKSERV.COM


TOP VIEW

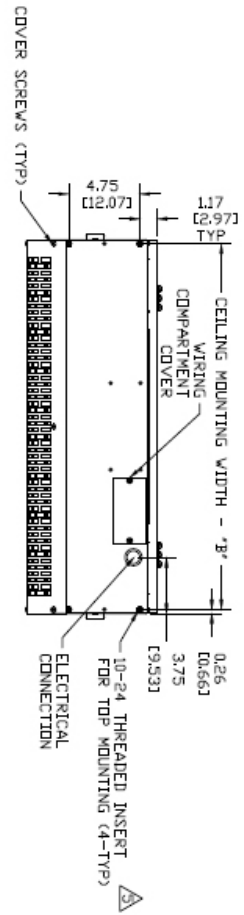

FRONT VIEW

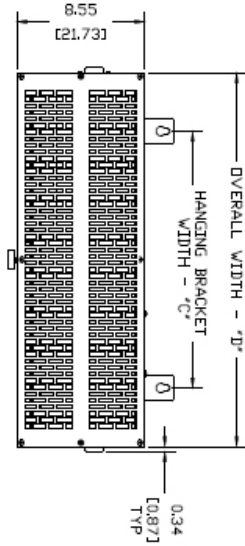

BOTTOM VIEW

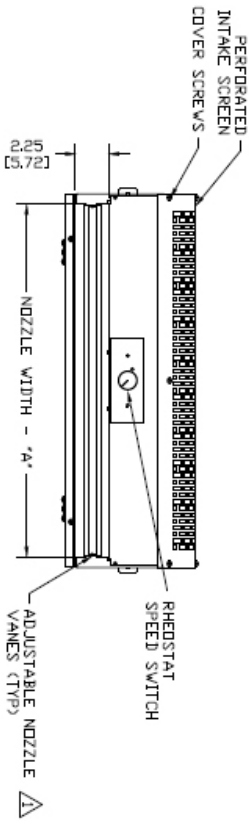


QUIKSERV

NON-HEATED AIR CURTAIN

MODEL: QSK1025AA-BK

END VIEW

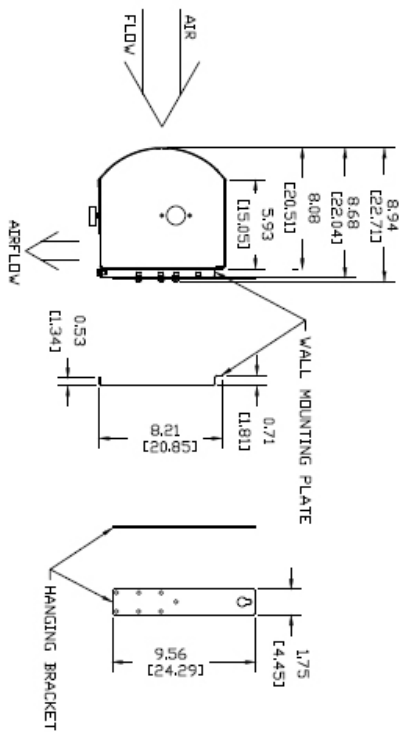

NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF ♀
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 DIMENSIONS IN INCHES (CENTIMETERS).

MODEL	NOZZLE WIDTH "A"	CEILING MOUNTING WIDTH "B"	HANGING BRACKET WIDTH "C"	UNIT WIDTH "D"
QSV1025AA-BK	23.60 [59.94]	24.48 [62.19]	17.25 [43.82]	25.00 [63.50]

ALL QUIKSERV PRODUCTS ARE SHIPPED FULLY-ASSEMBLED AND READY TO INSTALL.